



TECHNICAL SPECIFICATIONS

Length	935 mm
Width	622 mm
Height	300 mm
Weight	16 kg
Design capacity	7 m ³ /h
Capacity, certified max	18 m ³ /h



The aluminum Slurp Skimmer comes complete with:


- Debris Screen
- 50' (15 m) 1 ½" I.D. PVC suction hose
- 3 pcs 1 ½" Hose floats and necessary couplings

SLURP (Self-Leveling Unit for Removing Pollution) is a self-adjusting, floating weir-type oil skimmer, originally developed by Esso Research Centre, Abingdon, England. Used worldwide for over twenty years to remove oil and other floating pollutants from the surface of protected waters, SLURP is one of the most versatile skimmers made, working efficiently in any situation at rates up to 30 gpm [7 m³/h]. Rugged and lightweight, it can easily be handled by one person.



The SLURP Oil Skimmer has no moving parts. Weir immersion is remotely controlled from the pump; there is nothing to adjust at the skimmer. The SLURP works well in long swells and even in short, choppy waves owing to its unique design. Unlike most conventional floating weir-type skimmers which become unstable when the weir level is set very close to the surface, the SLURP will adjust to any depth of weir immersion and skim the thinnest of oil slicks.

The aluminum model has a very shallow draft and is easy to deploy due to its light weight.

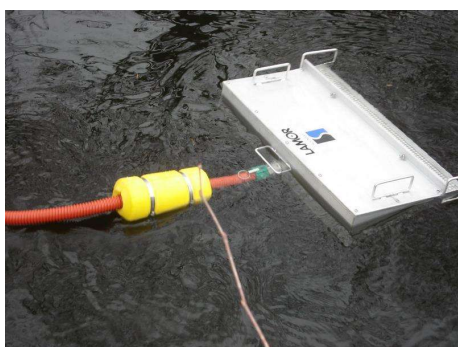

Standard equipment includes a hose float, an intake debris screen, and 50 feet of 1 ½" (Inner Dimension) suction hose with quick connect fittings. The aluminum model has hose floats integral with the suction hose. All SLURPS have a 2" female NPT discharge port, reducing bushing, and a 1 ½" fitting, which matches the quick-connect fittings on the standard suction hose.

Technical specifications in US standard:
36.8" (L) x 24.5" (W) x 15.0" (H), 36 lbs.
Capacity: 30 gpm

